

10/ 509, 846  
Rec'd PCT/PTO 5 - JAN 2006

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
17 March 2005 (17.03.2005)

PCT

(10) International Publication Number  
**WO 2005/024273 A1**

(51) International Patent Classification<sup>7</sup>: **F16H 25/20**

Michael [GB/GB]; 7 Fir Tree Grove, Bredhurst, Gillingham, Kent ME7 3LB (GB).

(21) International Application Number:  
PCT/GB2004/003653

(74) Agents: **ROONEY, Paul, Blaise** et al.; BAE Systems plc, Group IP Department, Lancaster House, P.O. Box 87, Farnborough Aerospace Centre, Farnborough, Hampshire GU14 6YU (GB).

(22) International Filing Date: 26 August 2004 (26.08.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0320909.5 5 September 2003 (05.09.2003) GB  
03255557.5 5 September 2003 (05.09.2003) EP

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (for all designated States except US): **BAE SYSTEMS PLC** [GB/GB]; 6 Carlton Gardens, London, Greater London SW1Y 5AD (GB).


(72) Inventor; and

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

(75) Inventor/Applicant (for US only): **CORNEY, John,**

[Continued on next page]

(54) Title: APPARATUS FOR RELEASING A JAM IN A LEAD SCREW ACTUATOR

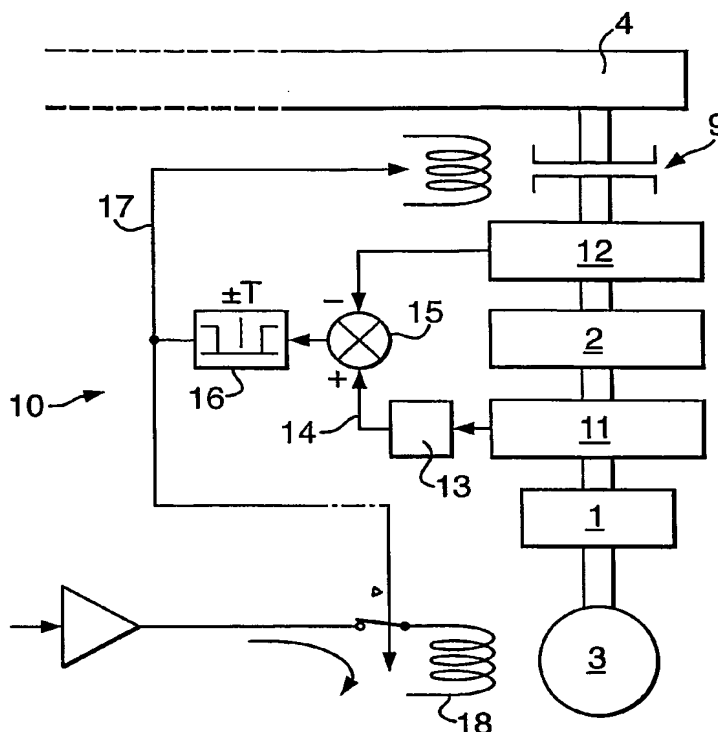

(57) Abstract: Apparatus for releasing a jam between an inter-engaged lead screw and nut in a motor driven lead screw actuator under load includes a device for releasing the jam and a device for operating the jam release device when the normal operating correlation between torque applied to the actuator by the motor and the output force of the actuator corresponding to normal unjammed operation of the actuator under load is lost.

WO 2005/024273 A1



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## APPARATUS FOR RELEASING A JAM IN A LEAD SCREW ACTUATOR

This invention relates to an apparatus for releasing a jam in a lead screw actuator between an inter-engaged lead screw and nut in a motor driven lead screw actuator under load, particularly, but not exclusively, suitable for use in an aircraft.

Conventional lead screw actuators (sometimes referred to as screw jacks) as shown in Figures 1 and 2 of the accompanying drawings, are a means of exerting a force by causing a nut 1 to turn on a lead screw 2. When a torque is applied to the nut 1 there is a resultant linear force on the lead screw 2 if the latter is prevented from turning with the nut. Alternatively the arrangement may operate in reverse with the torque being applied to the lead screw 2 and the resultant force being exerted on the nut 1 which is prevented from turning. For example in Figure 1 a motor 3 is shown applying torque to the nut 1 thereby causing it to attempt to move up the lead screw 2. However as the motor 3 and nut 1 are restrained from moving upwards on the lead screw 2 the result is that the lead screw 2 will attempt to move upwards or downwards depending on the direction of the motor torque applied to the nut 1, hence applying a force to a load 4 via an inter-connected linkage 5, which in turn is also designed to prevent the lead screw 2 turning about its longitudinal axis.

In the arrangement shown in Figure 2 the motor 3 applies torque to the lead screw 2 which thereby applies a force in the vertical direction to the load 4 via the nut 1 which is not free to turn, and the linkage 5.

There is always a possibility of a mechanical jam occurring between the nut 1 and lead screw 2 thereby preventing applied torque from the motor 3 causing a force to be applied to the load 4. In certain applications, particularly within aerospace, it may be unacceptable for an actuator to jam. For example the actuator may be designed correctly to position a control surface such an aileron or elevator, or the swash-plate of a helicopter, and an incorrect position may have critical implications in respect of safety.

It is therefore necessary to design a lead screw actuator for such usages so that not only in normal operation but also under extreme loading conditions, the motor torque does not reach the level at which a conventional torque

- 2 -

transmitting disconnect clutch will operate. This means that the motor will need to be significantly more powerful than would be necessary to accomplish its normal actuation task with a consequent impact on size, weight and cost. Another problem with conventional lead screw actuators in aerospace applications is in force-coupled arrangements where two or more actuators are coupled in parallel to a single load such as an aircraft control surface. If one actuator is operating correctly and the other actuator is jammed between its nut and lead screw the result is that whenever a deflection of the control surface is required a force-fight occurs between the two actuators without the required movement of the control surface occurring. Unfortunately under such a force-fight condition it is quite possible that the unjammed actuator will reach its torque threshold first and incorrectly disconnect itself presenting an unsatisfactory and possibly safety critical outcome. A similar situation occurs whenever the number of force-coupled actuators is greater than the number of degrees of freedom of the load. Examples of this include three or more actuators coupled to a two degree of freedom swash-plate and four or more actuators coupled to a three degree of freedom swash-plate as found in helicopters.

There is thus a need for improved apparatus for releasing a jam between an inter-engaged lead screw and nut in a motor driven lead screw actuator under load which does not operate even under high torque conditions in normal non-jammed operation and which can effectively distinguish between an internal jam and external loads.

According to the present invention there is provided apparatus for releasing a jam between an inter-engaged lead screw and nut in a motor driven lead screw actuator under load, including a device for releasing the jam and a device for operating the jam release device when the normal operating correlation between torque applied to the actuator by the motor and the output force of the actuator corresponding to normal unjammed operation of the actuator under load is lost.

In one implementation the jam release device is electro-mechanical and the device for operating the jam release device is electrical.

- 3 -

Conveniently the device for operating the jam release device includes a torque sensor for sensing the torque applied to the actuator, a force sensor for sensing the output force of the actuator, means for comparing the expected normal operating force for a given torque to the actual force at the actual measured torque, and means for actuating the jam release device if the difference between the expected force and the actual measured force is outside a pre-determined threshold and for switching off drive power to the motor.

Advantageously the device for operating the jam release device includes a torque sensor for sensing the torque applied to the actuator, a force sensor for sensing the output force of the actuator, and means for actuating the jam release drive if the sensed force is more positive than a predetermined threshold value  $T_1$  and the sensed torque is more negative than a predetermined threshold value  $T_3$  or if the sensed force is more negative than a predetermined threshold value  $T_1$  and the sensed torque is more positive than a predetermined threshold value  $T_3$ , which actuating means is also operable to switch off drive power to the motor.

Preferably the jam release device is an electromagnetic clutch.

Alternatively the jam release device and the device for operating the jam release device are mechanical and combined.

Preferably said devices include two or more spaced apart parallel opposed, cams connectable to the actuator motor in parallel to the lead screw and in drive connection to the motor, at least two spring-loaded finger detents moveably housed one in each cam to project therefrom substantially parallel to one another into the space between the opposed cams, and a peg projecting laterally from the actuator nut for location in the space between the cams to engage between and in contact with both projecting finger detents, so that with the apparatus operatively connected to the actuator and motor and with a load applied to the end of the lead screw remote from the end adjacent to the motor, drive is applied to the lead screw from the motor via the cams attached to the motor, finger detents carried by the cams, and peg attached to the nut, which peg is engaged by and between the finger detents and the angle of the cams being such that the reaction force on the peg under drive from the motor is

- 4 -

substantially at right angles to cam faces on the cams, such that if the actuator jams the peg displaces the respective finger detent against the spring-loading and moves out of engagement with the finger detents and cams thereby de-clutching the motor from drive contact with the nut to release the jam.

5           Alternatively said devices include two or more pairs of oppositely directed spaced apart cam surfaces operatively attached to the circumferential surface of the actuator nut for engagement by spaced apart pairs of drive pegs carried on a tubular member surrounding said nut and spring-loaded in the axial direction of the actuator lead screw carrying the load and screw threadably  
10   engaging the nut, which tubular member is axially moveably spring-loadably mounted in an annular surrounding housing in drive contact with the drive motor so that drive is imparted to the nut from the motor via the housing, tubular member, drive pegs and cam surfaces and in the event of a jam the drive pegs are driven along and out of engagement with the cam surfaces with  
15   accompanying axial movement of the tubular member against the spring-loading thereby de-clutching motor drive from the nut.

          Alternatively the apparatus may include the substitution in which the motor is in driving connection with the lead screw instead of with the nut and the tubular member is connected to the load instead of to the motor.

20           In yet a further alternative said devices may include two or more spaced apart, parallelly opposed, cams driveably connectable to the actuator motor in parallel to the lead screw and interconnected across the space between the cams by a frangible link extending therebetween, and a peg projecting latterly from the actuator nut for location in the space between the cams in engagement  
25   with the frangible link, so that with the apparatus operatively connected to the actuator and motor and with a load applied to the end of the lead remote from the end adjacent to the motor, drive is applied to the lead screw from the motor via the cams attached to the motor, the frangible link attached to the cams, and the engaging peg attached to the nut, which frangible link is strong enough to  
30   transmit normal torque drive to the nut via the peg but weak enough to shear, and thereby de-clutch the nut from the motor, in a jam situation to release the jam, which cams help to guide the peg as it moves away from its normal operating position after the frangible link has sheared.

- 5 -

Accordingly to a further aspect of the present invention the apparatus is used in an aircraft.

For a better understanding of the present invention, and to show how the same may be carried into effect, reference will now be made, by way of  
5 example, to the accompanying drawings, in which;

Figure 1 is a schematic view of a conventional lead screw actuator not according to the present invention,

Figure 2 is a diagrammatic illustration of a second version of a conventional lead screw actuator not according to the invention of the present  
10 application,

Figure 3 is a graphical representation of the correlation between applied torque and output force as utilised in the present invention,

Figure 4 is a diagrammatic illustration of an electro-mechanical apparatus according to a first embodiment of the present invention for releasing  
15 a jam,

Figure 5 is a diagrammatic illustration of a logic based electro-mechanical apparatus according to a second embodiment of the present invention for releasing a jam,

Figures 6, 7, 8 and 9 are diagrammatic illustrations of the operating  
20 sequence in a jam release apparatus according to a third embodiment of the present invention,

Figure 10 is a partially sectioned view along the section line AA of Figure 11 showing a jam release apparatus according to a fourth embodiment of the present invention,

25 Figure 11 is a cross-sectional view taken on the line BB of Figure 10,

Figure 12 is a cross-sectional view taken along the line CC in Figure 13 of a jam release apparatus according to a fifth embodiment of the present invention,

Figure 13 is a cross-sectional view taken along the line DD in Figure 12,

- 6 -

Figures 14, 15 and 16 show schematically operating stages for the jam release apparatus of Figures 12 and 13,

Figures 17, 18 and 19 show operating stages for a jam release apparatus according to a sixth embodiment of the present invention,

5        Figures 20, 21, 22 and 23 show schematically alternative mounting positions for jam release apparatus according to any one of the embodiments of the present invention.

Apparatus for releasing a jam between an inter-engaged lead screw 2 and nut 1 in a motor driven lead screw actuator under load according to the present invention operates on the application of the correlation of the applied torque from the motor 3 with the resultant linear output force. Assuming very low friction within a correctly functioning lead screw actuator an applied torque will produce an approximately proportional output force as indicated in Figure 3 of the accompany drawings. Figure 3 illustrates graphically the relationship between output force 6 and applied torque 7 showing the correlation hysteresis between these two forces under normal operating conditions of the actuator. Any small level of static friction existing within the lead screw actuator will result in the hysteresis characteristic as indicated at 8 but the effect of this minor hysteresis may be ignored. The torque-force correlation of Figure 3 means specifically that a clockwise torque (defined here as positive as viewed from below and with a right hand threaded screw) will result in a retract (tensile) force (also defined here as positive) while a counter clockwise (negative) torque results in an extend (compressive) force defined here as a negative force. This correlation is no longer maintained if the actuator jams.

25        In the case of a single lead screw actuator coupled to a load the results of such a jam will be to cause the output force to traverse the horizontal (zero force) axis 7 as the torque is varied throughout its range. In the case of the parallel force-coupled arrangement (not illustrated) the good actuator will follow the normal torque-force relationship shown in Figure 3 while the jammed actuator will follow an inverse characteristic. The jammed actuator of such a pair will experience an extend (negative) force as positive torque (clockwise torque as observed from below) is applied to each of the actuators. In other

30



- 7 -

words the non-jammed actuator of the pair maintains the correct positive correlation between the applied torque and the force while the jammed actuator maintains a negative correlation. It is this lack of correlation between the applied torque and output force of the jammed actuator that is utilised in the invention of the present application.

Figure 4 of the accompanying drawings shows an apparatus for releasing a jam between an inter-engaged lead screw 2 and a nut 1 with drive being provided by motor 3. The apparatus includes a device for releasing the jam and a device for operating the jam release device when the normal operating correlation between the torque applied to the actuator by the motor 3 and the output force of the actuator corresponding to normal unjammed operation of the actuator under load 4 is lost. In this embodiment the jam release device is electro-mechanical, preferably in the form of an electromagnetic clutch 9 and the device 10 for operating the jam release device 9 is electrical. The device 10 for operating the jam release device 9 includes a torque sensor 11 for sensing the torque applied to the actuator. A force sensor 12 is provided for sensing the output force of the actuator. As an alternative to the use of the torque sensor 11 a current sensor could be provided.

Means are provided for comparing the expected normal operating force for a given torque to the actual force at the actual measured torque. The implementation described below could equally be carried out by analogue or digital techniques, and it should be noted that the electronic implementation is not the only way. Conveniently the means is in the form a comparator 13 which provides the factor  $K_1$  which is the ratio between the expected force due to a given torque and compares the expected force derived in this way to be compared with the actual measured torque. An output signal 14 is provided in the form a force command to a summer 15 where it is compared with the output signals from the force sensor 12. The summation signal is passed to a further unit 16 where the outputted signal is checked for agreement between the expected force and the actual measured force within a predetermined threshold plus or minus  $T$ . If this agreement exists the actuator is considered to be within normal operating tolerances. However if the difference between these quantities exceed this threshold value in either direction then the actuator is

- 8 -

deemed to have jammed. At this point a signal is fed through line 17 to the electromagnetic clutch 9 to disengage the latter first to disconnect the actuator from the load 4. At the same time energisation of the motor drive 18 is disconnected thereby stopping the motor 3. This disconnection is not instantaneous. In order to avoid erroneous operation an appropriate time delay or failure count preferably is implemented before the disconnect process is launched within the electronic logic.

A second electro-mechanical apparatus according to the present invention is shown in Figure 5 in which like parts previously illustrated in Figure 4 and previously discussed in connection therewith will be given like reference numbers and not described in further detail. This specific embodiment is intended for use with a force-coupled actuator arrangement in which a number of actuators are connected in parallel with a load and in which a jam in one of the actuators produces powerful reverse correlation between torque and force. Thus in the embodiment of Figure 5 jam release occurs when the correlation between the force and torque is opposite to that which occurs in normal jam-free operation. Jam release occurs when the following logic condition occurs.

**Logic L<sub>1</sub>.** The sensed force is more positive than a predetermined threshold T<sub>1</sub> AND the sensed torque is more negative than a predetermined threshold T<sub>3</sub>.

or

**Logic L<sub>2</sub>.** The sensed force is more negative than a predetermined threshold T<sub>1</sub> AND the sensed torque is more positive than a predetermined threshold T<sub>3</sub>.

The thresholds are adopted so as to reduce the chance of nuisance jamming release and to allow for some remanent friction during normal operation.

Alternatively the jam release device and the device for operating the jam release device can be mechanical and combined for example as shown diagrammatically in apparatus according to a third embodiment of the present invention as illustrated schematically in Figures 6 to 9 of the accompanying drawings. Effectively this embodiment illustrates a mechanical coupling which

- 9 -

can only transmit clockwise torque when pulling the load and can only transmit counter-clockwise torque when pushing the load, assuming a right hand thread lead screw. Once again like parts already described in connection with previous embodiments will be given like reference numerals and not described in further detail. In this third embodiment the apparatus according to the invention is installed between the motor 3 and nut 1 where it is subject to both torques and forces. It includes two or more spaced apart parallelly opposed, cams 19 connectable to the actuator motor 3 in parallel to the lead screw 2 and in drive connection to the motor 3. At least two spring-loaded finger detents 20 are provided movably housed one in each cam 19 to project therefrom substantially parallel to one another into the space 21 between the cams 19 to engage between and in contact with both projecting finger detents 20. A peg 22 is provided projecting laterally from the actuator nut 1 for location in the space 21 between the cams 19 to engage between and in contact with both projecting finger detents 20. The angle of the cams 19 is such that the reaction force on the peg 22 as the motor 3 drives the nut 1 via the apparatus is nominally at right angles to the face of the cams. Thus the peg 22 will remain midway between the two spring-loaded finger detents 20 regardless of whether the jam release apparatus is being subjected to positive or negative torques and forces.

Figure 6 shows that for a clockwise torque from the motor 3, as seen from below, movement of the motor in the direction of the arrows thereon there will be a tensile or retract force applied to the load 4. If a jam now occurs between the nut 1 and the lead screw 2 the output force will fall to zero if it is a single actuator or the force will reverse if the actuator is part of a multiple force-coupled actuator arrangement.

Figure 7 shows the situation when a jam initially occurs. In this condition the force reaction between the cams 19 and peg 22 is no longer at right angles to the line of the faces of the cams 19. This allows relative rotation, clockwise as seen from below, of the cams 19 with respect to the driven peg 22 due to the combination of the clockwise motor torque and the effect of any compressive force reflected from the redundant force coupled actuators if the actuator is used in such an arrangement.

- 10 -

At low departures from the desired torque-force relationship or lack of correlation therebetween the peg 22 remains constrained by the spring-loaded finger detents 20 which define the point at which the jam becomes released. Effectively the peg 22 attached to the jammed nut 1 starts to move downwards against the lowermost detent 20 as the motor torque causes the cams 19 to start to move to the right of Figure 7. Whereas in Figure 6 the force on the peg 22 is normal to the faces of the cams 19 in the Figure 7 situation the force on the peg 22 is no longer normal to the cam faces. Similarly in the Figure 6 situation tensile force is applied against the external load but in the Figure 7 situation a compressive force is applied to the load by the jamming actuator. The finger detents 20 define the point at which the jam becomes released. When the detent spring-loading threshold is reached the peg 22 and motor 3 become progressively de-clutched from each other as shown in Figure 8 of the accompanying drawings. As can be seen from Figure 8 the peg 22 is at the stage of overcoming the spring-loading of the detent 20 and there has already been significant movement clockwise of the cams 19 and downward movement of the nut 1, lead screw 2 and load 4. As the motor 3 rotates further the peg 22 becomes completely released from the cams 19 and from then on the jam has been completely released as shown in Figure 9 of the accompanying drawings.

A fourth embodiment of the present invention is illustrated in Figures 10 and 11 of the accompanying drawings. In this embodiment the devices include two or more pairs of oppositely directed spaced apart cam surfaces 23a and 23b operatively attached to the circumferential surface of the actuator nut 1. Spaced apart pairs of drive pegs 22 are provided carried on a tubular member surrounding the nut 1 and spring-loaded in the axial direction of the actuator lead screw 2 carrying the load 4 and screw threadably engaging the nut 1. The tubular member is in the form of two tubular parts 24a and 24b with the part 24b being slidably located within the part 24a. The tubular member part 24a is axially movably spring-loadably mounted by a spring 25 in an annular surrounding housing 26 in drive contact with the drive motor 3 so that drive is imparted to the nut 1 from the motor 3 via the housing 26, tubular members 24a and 24b, drive pegs 22 and cam surfaces 23a and 23b. In the event of a jam the drive pegs 22 are driven along and out of engagement with the cam

- 11 -

surfaces 23a and 23b with accompanying axial movement of the tubular member 24a and 24b against the loading of the spring 25 thereby de-clutching the motor drive from the nut 1.

5 A jam release apparatus according to a fifth embodiment of the present invention is shown in Figures 12, 13, 14, 15 and 16 of the accompanying drawings. The apparatus of this embodiment the invention is basically the same as that of Figures 10 and 11 but in this embodiment the motor 3 drives the lead screw 2 direct which in turn drives the nut 1 which is linked to an external load 4 in the form of a swash-plate via an interconnecting linkage 5. As  
10 this embodiment of the invention is basically the same as the embodiment of Figures 10 and 11 like parts will be given like reference numbers and not further described in detail. Hence in this embodiment the tubular member 24a and 24b, is connected directly to the load via an annular interconnecting linkage 5.

Figures 14, 15 and 16 of the accompanying drawings show the jam  
15 release sequence for the embodiment of Figures 12 and 13, following incorrect torque-force correlation. This sequence is also applicable to the embodiment of Figures 10 and 11. Figure 14 shows normal operation when there is no jam condition and when the external load is relatively low. Here the pegs 22 are in tight contact with the respective upper and lower cam surfaces 23a and 23b.  
20 Figure 15 shows the situation where there is a jam between the nut 1 and the lead screw 2 while the actuator is trying to pull the load downwards. Here the lower peg 22 in Figure 15 has also moved downwards by the action of the external forces moving out of contact with the cam surface 23b. The torque reaction from the motor 3 ultimately causes the cam member carrying the cam  
25 surfaces 23a and 23b attached to the nut 1 to move to the right in Figure 16 and to escape from between the pegs 22 into the jam release position shown in Figure 16.

An alternative apparatus according to a sixth embodiment of the present invention is illustrated diagrammatically in Figures 17, 18 and 19 of the  
30 accompany drawings. In this apparatus the devices include two or more spaced apart, parallelly opposed, cams 19 as in previous embodiments which cams 19 are driveably connected to the actuator motor 3 in parallel to the lead screw 2. The cams 19 are interconnected across the space 21 between the

- 12 -

cams by a frangible link 27 extending therebetween which acts as a shear link. A peg 22 projecting laterally from the nut 1 as can be seen particularly in Figure 18 is located in the space 21 in engagement with the frangible link 19. To this end the peg 22 may actually be formed integrally with the link 27 or just be in  
5 engagement therewith. The link 27 has directional characteristics. This means that it is relatively strong in the direction of normal operation of the actuator but relatively weak in the direction that occurs under a jam condition. Thus Figure 17 shows the normal operating condition in which the combination of torque and reaction to the actuator output load is transmitted along the strong axis of the  
10 link 27 into its attachment to the nut 1 via the peg 22. The link is designed to be adequately strong in this diagonal direction to support the highest loads likely to be encountered in normal operation of the linear actuator.

In the event of a jam between the nut 1 and the lead screw 2 the force between the motor 3 and the attachment of the link 27 to the nut 1 via the peg  
15 22 will no longer be along the strong axis of the link 27. The result is that large forces will be applied along the weak axis resulting in the shearing of the link 27 and the release of the jam as shown in Figure 18. Figure 18 shows this shearing process as a result of the motor torque being applied laterally with respect to the drawing without there being any actuator load to move the nut in  
20 a vertical axis. This condition applies when a jam occurs as the actuator is attempting to move the load downwards but there is no significant output force.

Figure 19 shows the continuation of this shearing process and the jam release when the jammed actuator is one of a set of two or more force-coupled actuators. In this case the effects of the other actuators which are operating  
25 correctly is to try to force the jammed actuator to retract thus augmenting the motor torque in the jam release process which results in the nut 1, lead screw 2 and load 4 all moving downwardly whilst the motor 3 rotates in a clockwise direction as seen from below in Figure 19. In this embodiment the opposing parallel cams 19 only come into effect after the frangible links 27 have become  
30 disconnected by the jam forces, at which stage they help to guide the peg 22 as it moves away from its normal operating position.

The jam release apparatus according to the present invention may be located in various ways relative to a load 4, motor 3, lead screw and nut 1. For

- 13 -

example in the accompanying Figure 20 the motor 3 drives the nut 1 via a jam release apparatus 28 according to the present invention. In Figure 21 the motor drives the lead screw 2 via a jam release apparatus 28 according to the present invention and the nut 1 is coupled to the load 4 via the interconnecting link 5. In  
5 the Figure 22 arrangement the motor 3 drives the nut 1 directly with the jam release apparatus according to the present invention being coupled directly to the load 4 via the interconnecting link 5. Finally in the arrangement of Figure 23 the motor 3 drives the lead screw 2 whilst the nut 1 is connected to the load 4 via a jam release apparatus 28 according to the present invention and the  
10 interconnecting link 5. It is to be understood that apparatus for releasing a jam between inter-engaged lead screw and nut in a motor driven load screw actuator under load according to the present invention may be employed in any one of the ways shown in Figures 20, 21, 22 and 23 of the accompanying drawings. The arrangement of Figure 22 is preferred because the jam release  
15 apparatus 28 does not rotate with the motor 3 in normal operation of the actuator. This means that it is easier to monitor in aerospace applications such as in flight on an aircraft. In the Figure 22 arrangement the jam release apparatus 28 is physically separate from the motor 3 and nut 1 which simplifies operation. In the arrangements of Figures 20 and 21 the jam release apparatus  
20 28 is subject to the applied motor torque and to the actuator end loads. In the arrangements of Figures 22 and 23 the jam release apparatus 28 is subject to both the actuator force and the torque reaction.

It is to be understood that the apparatus of the present invention as described herein is particularly suitable for aerospace applications such as for  
25 correctly positioning a control surface such as an aileron or elevator or the swash-plate of a helicopter.

- 14 -

## CLAIMS

1. An apparatus for releasing a jam between an inter-engaged lead screw and nut in a motor driven lead screw actuator under load, including a device for releasing the jam and a device for operating the jam release  
5 device when the normal operating correlation between torque applied to the actuator by the motor and the output force of the actuator corresponding to normal unjammed operation of the actuator under load is lost.
2. Apparatus according to Claim 1, wherein the jam release device is  
10 electro-mechanical and wherein the device for operating the jam release device is electrical.
3. Apparatus according to Claim 2, wherein the device for operating the jam  
release device includes a torque sensor for sensing the torque applied to the actuator, a force sensor for sensing the output force of the actuator,  
15 means for comparing the expected normal operating force for a given torque to the actual force of the actual measured torque, and means for actuating the jam release device if the difference between the expected force and the actual measured force is outside a predetermined threshold and for switching off drive power to the motor.
- 20 4. Apparatus according to Claim 2, wherein the device for operating the jam release device includes a torque sensor for sensing the torque applied to the actuator, a force sensor for sensing the output force of the actuator, and means for actuating the jam release drive if the sensed force is more positive than a predetermined threshold value  $T_1$  and the sensed torque  
25 is more negative than a predetermined threshold value  $T_3$  or if the sensed force is more negative than a predetermined threshold value  $T_1$  and the sensed torque is more positive than a predetermined threshold value  $T_3$ , which actuating means is also operable to switch off drive power to the motor.
- 30 5. Apparatus according to Claim 2, Claim 3 or Claim 4, wherein the jam release device is an electromagnetic clutch.



- 15 -

6. Apparatus according to Claim 1, wherein the jam release device and the device for operating the jam release device are mechanical and combined.
7. Apparatus according to Claim 6, wherein the said devices include two or more spaced apart parallelly opposed, cams connectable to the actuator motor in parallel to the lead screw and in drive connection to the motor, at least two spring-loaded finger detents moveably housed one in each cam to project therefrom substantially parallel to one another into the space between the opposed cams, and a peg projecting laterally from the actuator nut for location in the space between the cams to engage between and in contact with both projecting finger detents, so that with the apparatus operatively connected to the actuator and motor and with a load applied to the end of the lead screw remote from the end adjacent to the motor, drive is applied to the lead screw from the motor via the cams attached to the motor, finger detents carried by the cams, and peg attached to the nut, which peg is engaged by and between the finger detents, and the angle of the cams being such that the reaction force on the peg under drive from the motor is substantially at right angles to cam faces on the cams, such that if the actuator jams the peg displaces the respective finger detent against the spring-loading and moves out of engagement with the finger detents and cams thereby de-clutching the motor from drive contact with the nut to release the jam.
8. Apparatus according to Claim 6, wherein said devices include two or more pairs of oppositely directed spaced apart cam surfaces operatively attached to the circumferential surface of the actuator nut for engagement by spaced apart pairs of drive pegs carried on a tubular member surrounding said nut and spring-loaded in the axial direction of the actuator lead screw carrying the load and screw threadably engaging the nut, which tubular member is axially movably spring loadably mounted in an annular surrounding housing in drive contact with the drive motor so that drive is imparted to the nut from the motor via the housing, tubular member, drive pegs and cam surfaces and in the event of a jam the drive pegs are driven along and out of engagement with the

- 16 -

cam surfaces with accompanying axial movement of the tubular member against the spring-loading thereby de-clutching motor drive from the nut.

9. Apparatus according to Claim 8, including the substitution in which the motor is in driving connection with the lead screw instead of with the nut,  
5 and the tubular member is connected to the load instead of to the motor.
10. Apparatus according to Claim 6, wherein said devices include two or more spaced apart, parallelly opposed, cams driveably connectable to the actuator motor in parallel to the lead screw, and interconnected across the space between the cams by a frangible link extending therebetween,  
10 and a peg projecting laterally from the actuator nut for location in the space between the cams in engagement with the frangible link, so that with the apparatus operatively connected to the actuator and motor and with a load applied to the end of the lead screw remote from the end adjacent to the motor, drive is applied to the lead screw from the motor  
15 via the cams attached to the motor, the frangible link attached to the cams, and the engaging peg attached to the nut, which frangible link is strong enough to transmit normal torque drive to the nut via the peg but weak enough to shear, and thereby de-clutch the nut from the motor, in a jam situation to release the jam, which cams help to guide the peg as it  
20 moves away from its normal operating position after the frangible link has sheared.
11. Apparatus according to any one of Claims 1 to 10, when used in an aircraft.
12. Apparatus for releasing a jam between an inter-engaged lead screw and  
25 nut in a motor driven lead screw under load substantially as hereinbefore described and as illustrated in Figure 4, Figure 5, Figures 6 to 9, Figures 10 and 11, Figures 12 to 16, and Figures 17 to 19 as modified or not by Figure 3 or any one of Figures 20 to 23 of the accompanying drawings.

1/8

Fig.1.

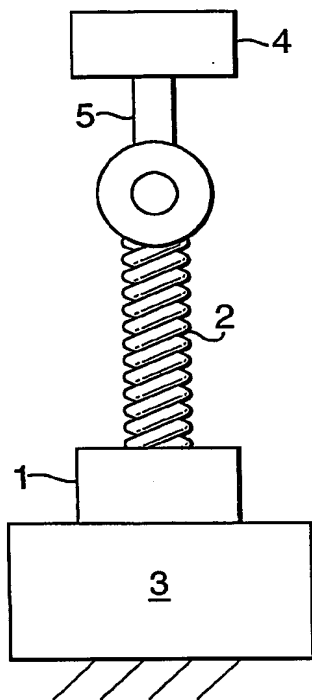


Fig.2.



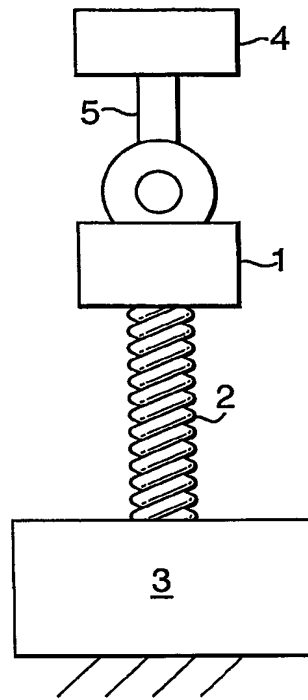


Fig.3.

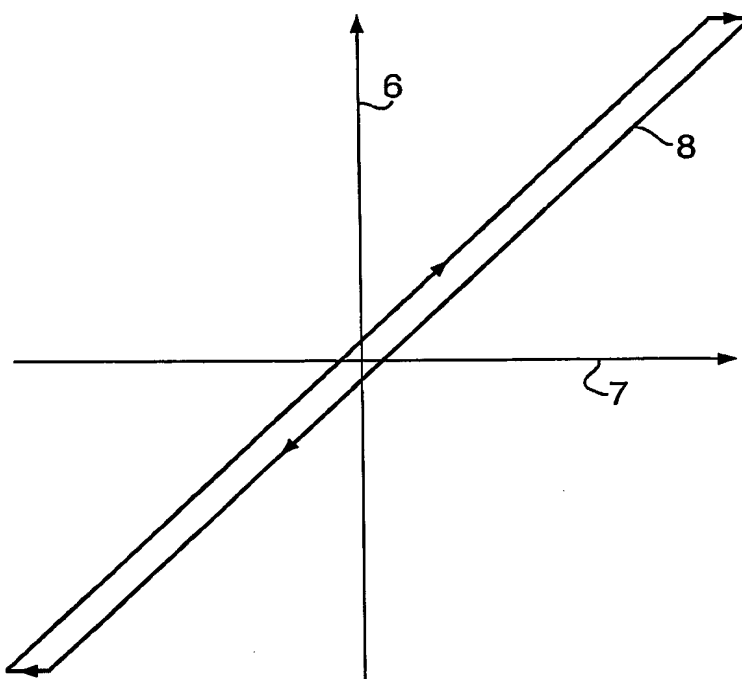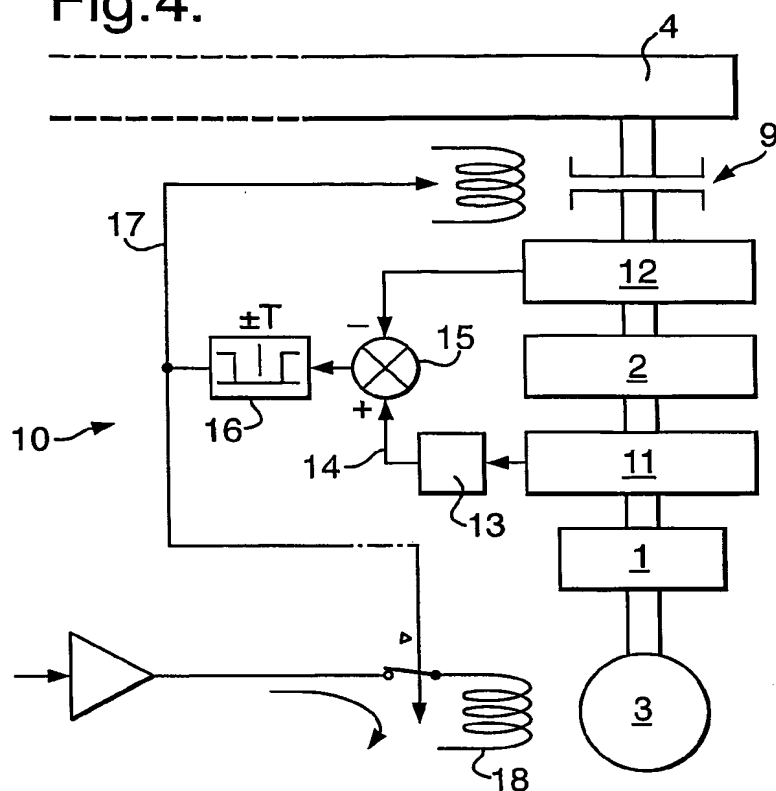






**2/8**



Fig.4.



**Fig.5.**

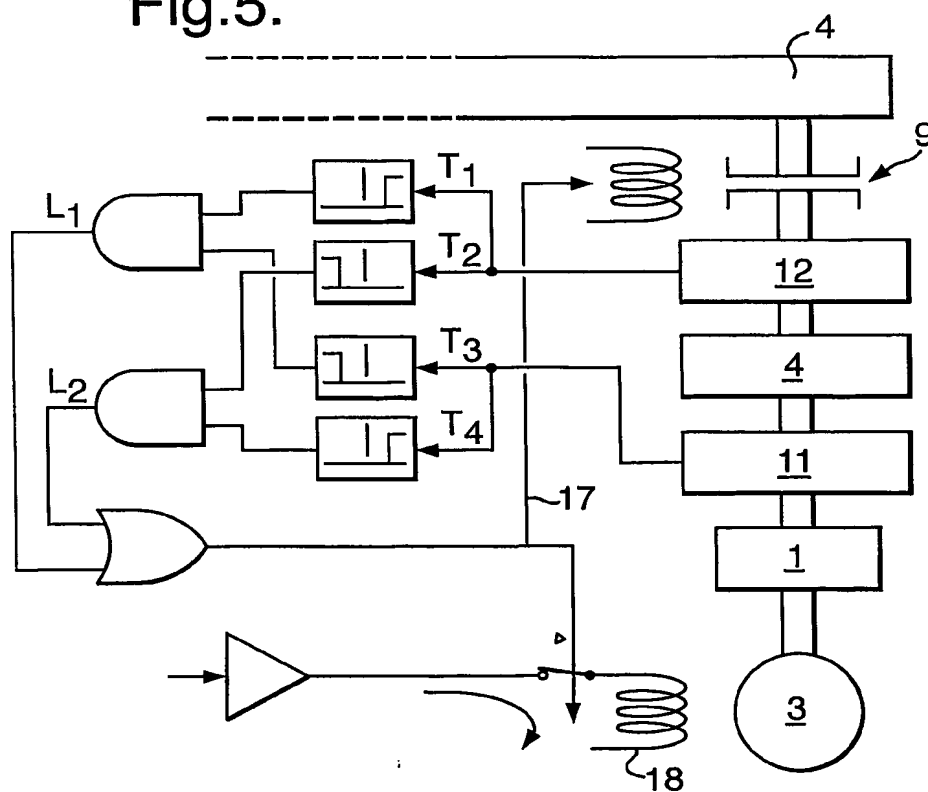

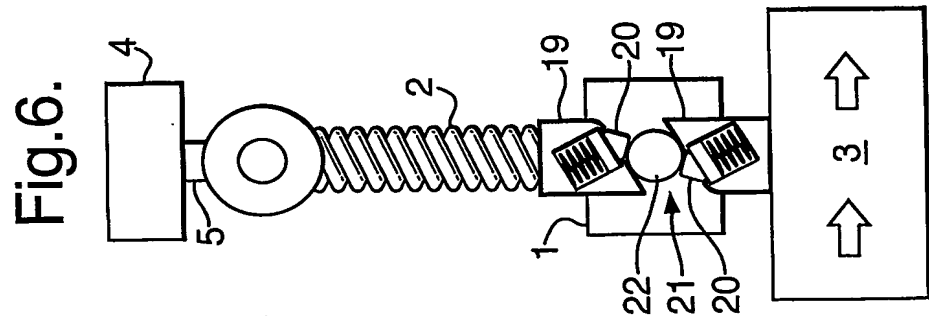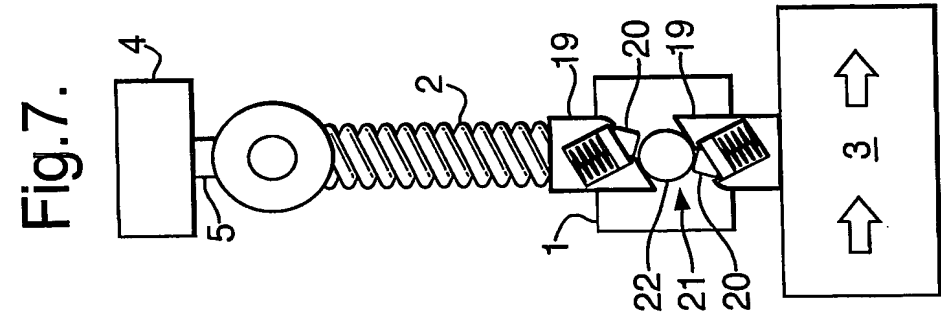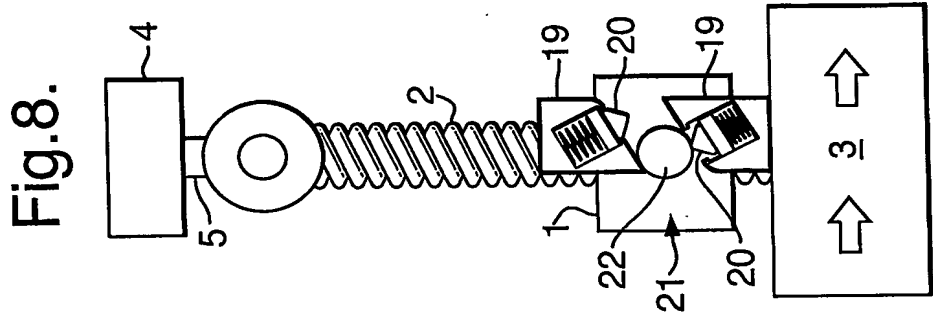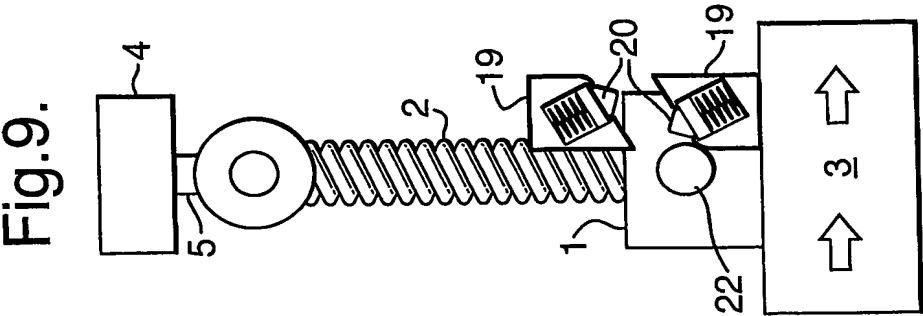

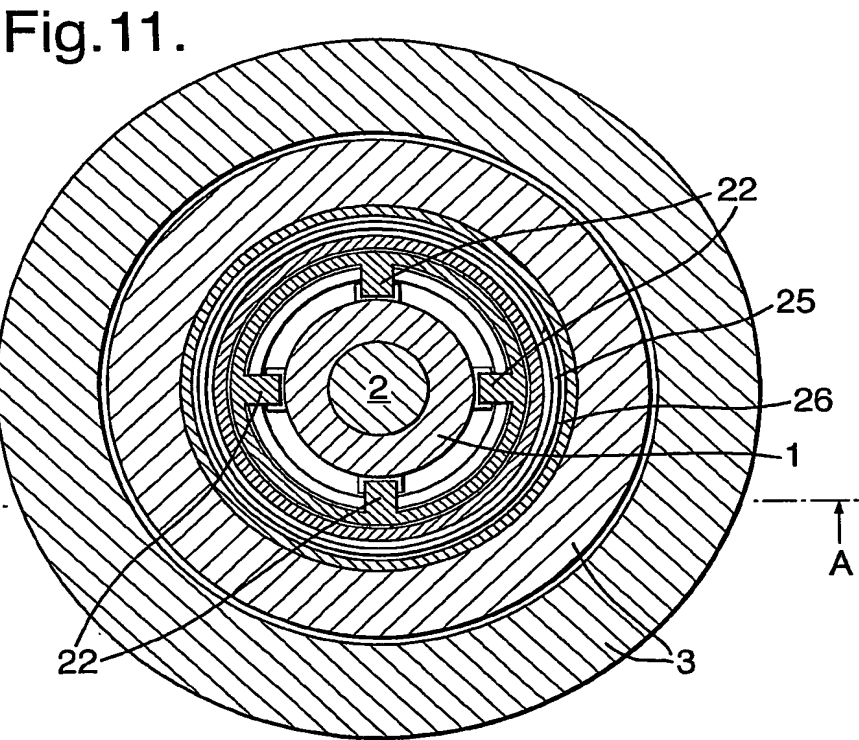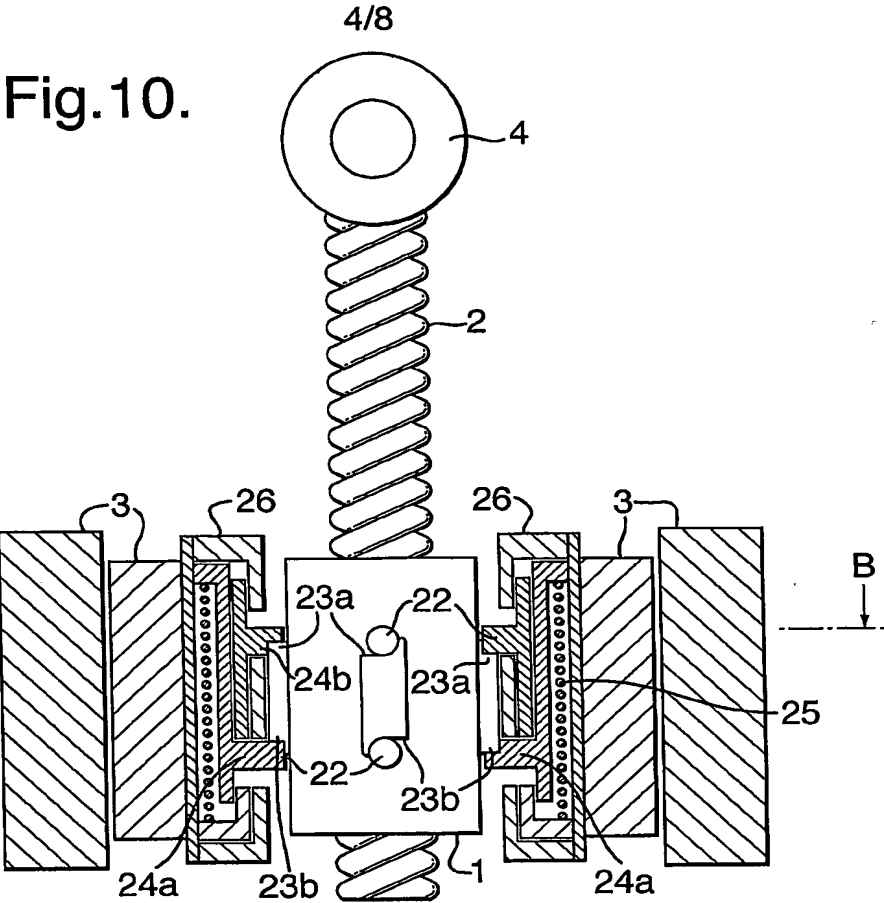

5/8

Fig.12.

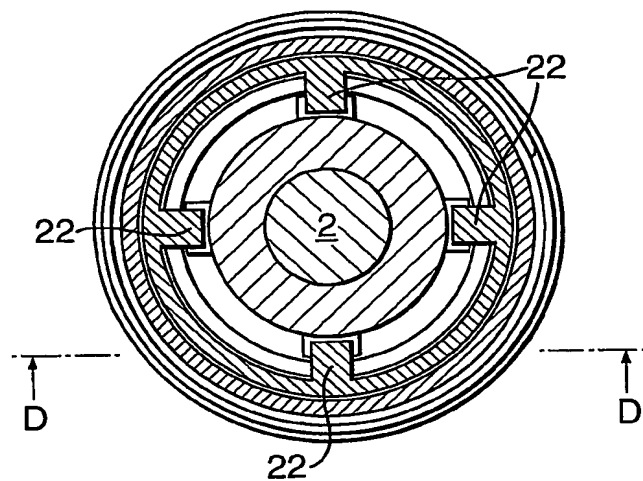


Fig.13.

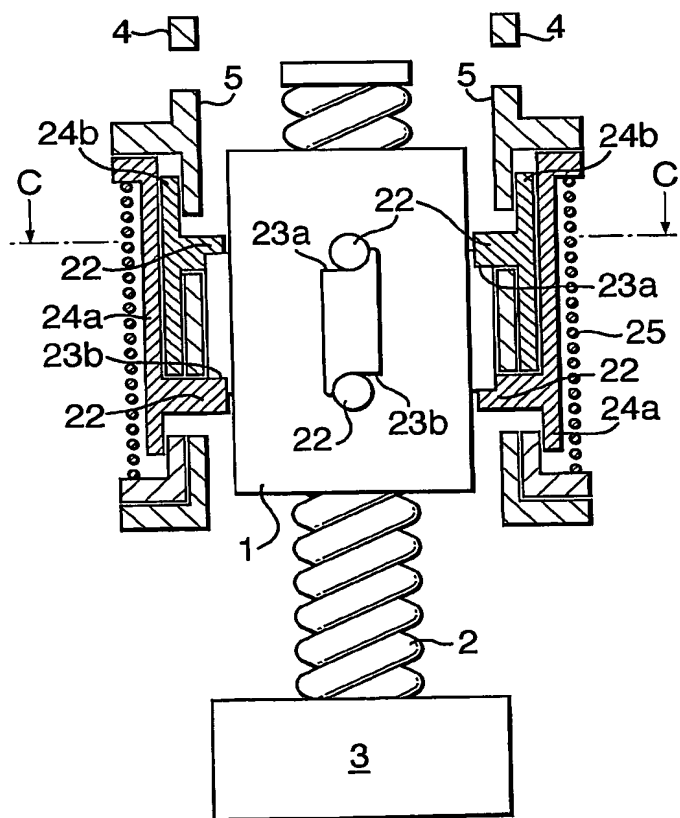


Fig.16.

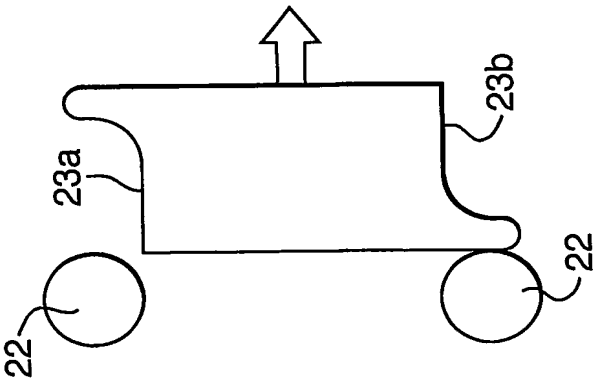


Fig.15.









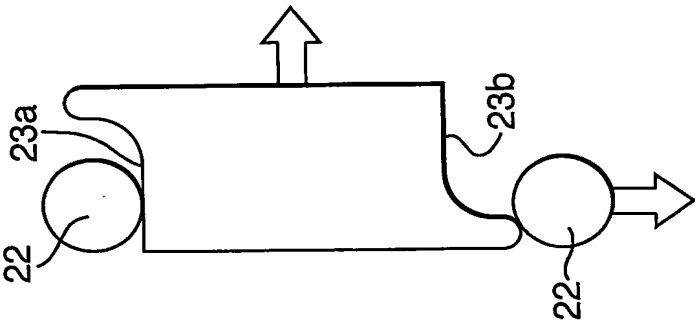


Fig.14.

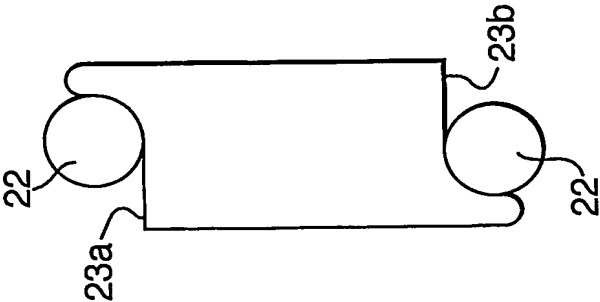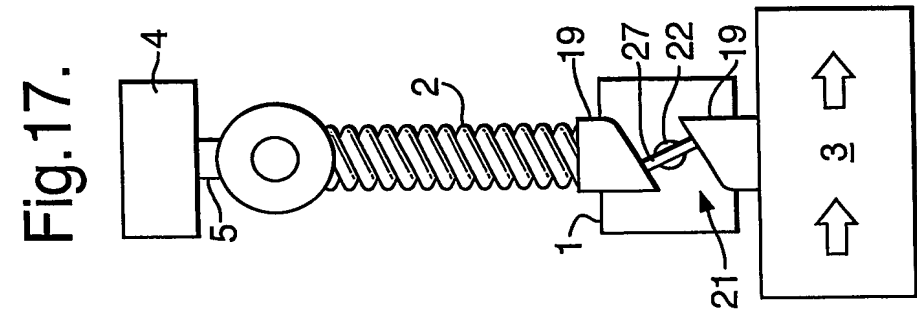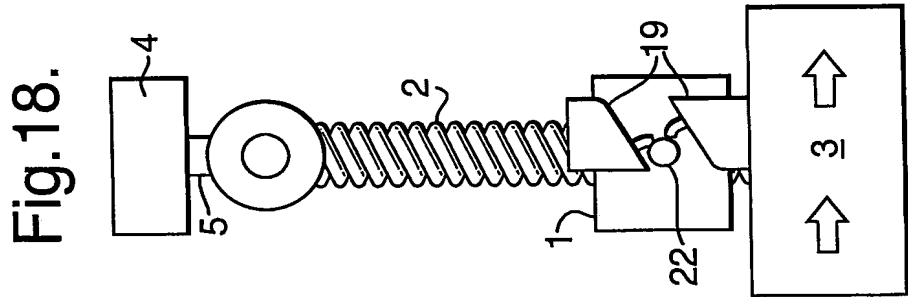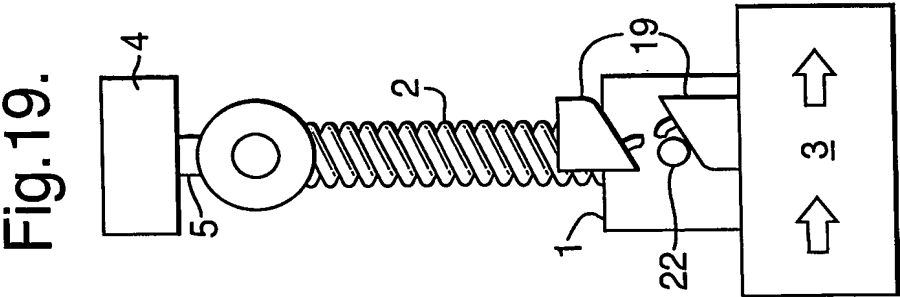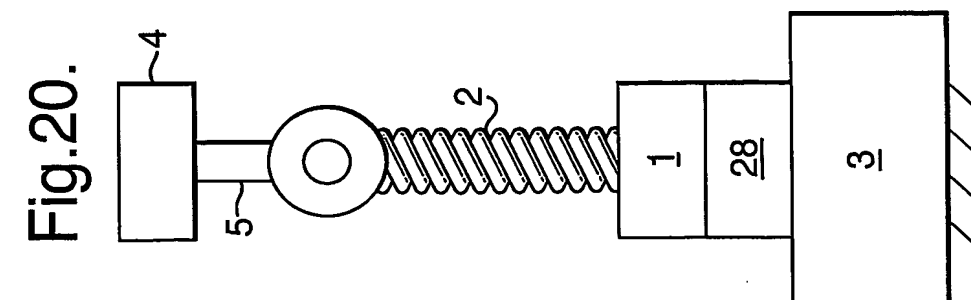

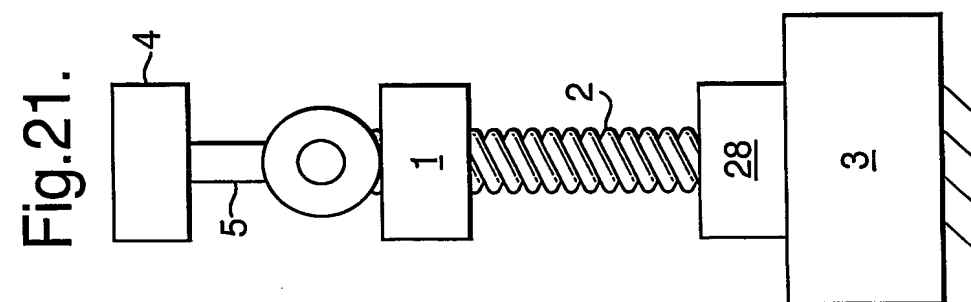

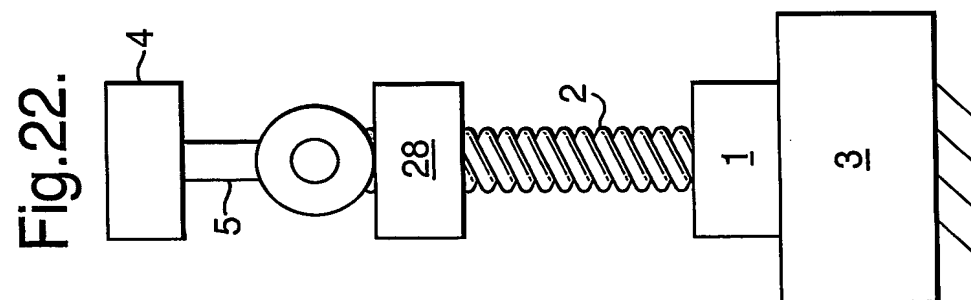

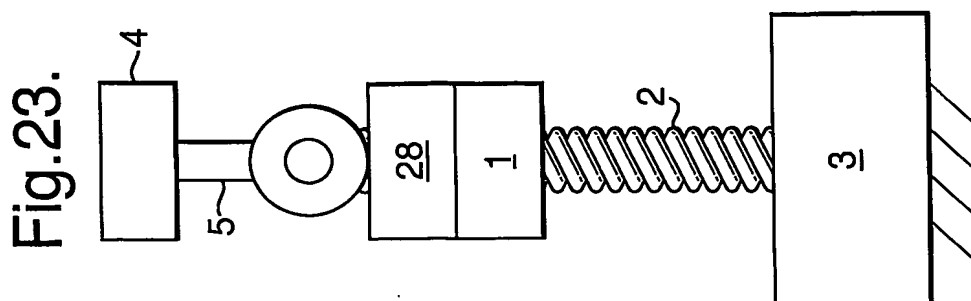

# INTERNATIONAL SEARCH REPORT

Intern application No  
PCT/GB2004/003653

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F16H25/20

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F16H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 202 13 740 U (S & R AUTOMATION SYSTEMS GMBH) 21 November 2002 (2002-11-21)	1-4
Y	the whole document	5
X	DE 11 98 159 B (FRITZ ELLER) 5 August 1965 (1965-08-05) figure 1	1,2
X	US 4 910 419 A (HAYASHI SHUJI ET AL) 20 March 1990 (1990-03-20) figures 1,3	1,2
Y	US 2 466 426 A (HOOVER VAINO A) 5 April 1949 (1949-04-05) column 2, line 41 - column 3, line 7	5

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

24 November 2004

Date of mailing of the international search report

11.02.05

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Hassiotis, V

# INTERNATIONAL SEARCH REPORT

In international application No.  
PCT/GB2004/003653

## Box II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-5

### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-5

Claims 1-5 relate to an apparatus for releasing a jam wherein the jam release device and the device for operating the jam release device are electrical.

---

2. claims: 6-12

Claims 6-12 relate to an apparatus for releasing a jam, wherein the jam release device and the device for operating the jam release device are mechanical.

---

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB2004/003653

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 20213740	U	21-11-2002	DE 20213740 U1	21-11-2002
DE 1198159	B	05-08-1965	FR 1424156 A	28-03-1966
			GB 1041502 A	07-09-1966
			US 3369087 A	13-02-1968
US 4910419	A	20-03-1990	JP 1166456 U	21-11-1989
			JP 2513403 Y2	09-10-1996
US 2466426	A	05-04-1949	NONE	